

Montana Bureau of Mines and Geology
Final Technical Report for NGWMN Award G20AC00187

Miscellaneous Contribution 25

January 2024

John LaFave



Montana Bureau of Mines and Geology NGWMN Final Technical Report

Award Number: G20AC00187

Agency Name: Montana Bureau of Mines and Geology

Title: Montana Bureau of Mines and Geology 2021 NGWMN Network
Enhancement–West Yellowstone Well Drilling Final Report

Author: John LaFave
Montana Bureau of Mines and Geology
1300 W. Park St.
Butte, MT 59701
(406) 496-4306, JLafave@mtech.edu

Term Covered: 07/15/2020–07/14/2023*
*Granted one-year COVID extension

Date of Final Report: August 31, 2023

Background

The Montana Bureau of Mines and Geology (MBMG) maintains a statewide groundwater monitoring network to collect water-level and water-quality data from about 800 wells. Many of these wells are completed in principal aquifers, including the heavily developed intermontane basin aquifers in the west (S100NRMTIB), and the less intensively developed but widely used alluvial (N100ALLUVL), Lower Tertiary (N300LTRTRY), Upper Cretaceous (N300UPCTCS), Lower Cretaceous (N300LCRTCS), and Paleozoic aquifers (N500PLOZOC) in the east (Whitehead, 1996). The MBMG became a National Groundwater Monitoring Network (NGWMN) data provider in 2015 and at the start of this project provided water-level data for 224 sites, and water-quality data for 58 sites.

In January 2020, the MBMG submitted a proposal in response to Program Announcement/Funding Opportunity G20AS00009 to complete a nested-well pair to monitor groundwater levels and quality in the basin-fill aquifer near West Yellowstone, Montana.

Description of Work Done to Support the NGWMN: Objective 5

The work performed for award G20AC00187 was under Objective 5: to drill a nested-well pair to enhance monitoring in the Northern Rocky Mountain Intermontane Basin (S100NRMTIB) principal aquifer near the town of West Yellowstone, Montana—a rapidly growing resort community on the outskirts of Yellowstone National Park, and within the Yellowstone Controlled Groundwater Area. The area is experiencing intense groundwater development, and is close to the Madison River and Yellowstone National Park. The objective was (a) to complete a well in the shallow-unconfined aquifer, and (b) the second completion depth in the deep-confined part of the basin-fill aquifer.

Site Selection

In January 2021, the MBMG met with representatives of the U.S. Forest Service (USFS) to review possible monitor well locations near West Yellowstone, Montana. A suitable site near the Smoke Jumper Base at the West Yellowstone Airport was identified (fig. 1). A USFS Special-Use Authorization permit to install and maintain two monitoring wells at the Smoke Jumper Base was signed in March 2021 (copy included in appendix A).

Contractor Selection

An “Invitation to Bid” on the well drilling was prepared by the MBMG and issued through Montana Tech Procurement on March 1, 2021; the successful bidder was Excel Pump & Well Inc., and a contract was awarded on April 12, 2021.

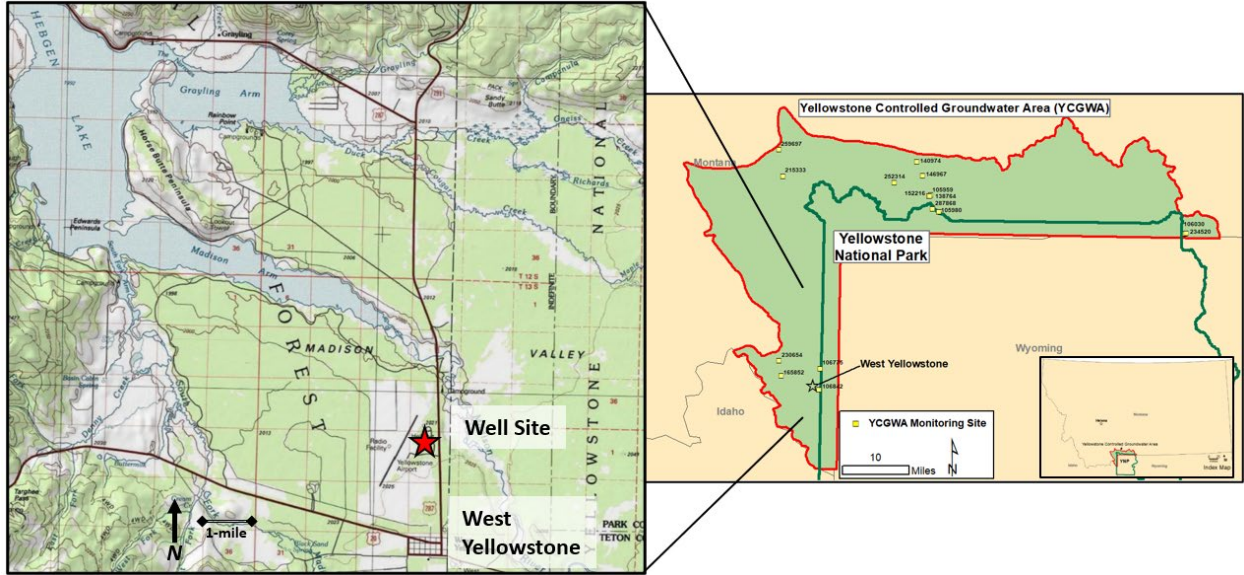


Figure 1. Location of well site approximately 2 miles north of West Yellowstone, MT.

Well Drilling

Between June and August 2021, a shallow and deep well were installed at the site using a dual rotary rig (fig. 2); cuttings were logged (fig. 3) and the drilling was supervised by the onsite MBMG hydrogeologist. The deep well was drilled first to assess the subsurface conditions and determine optimal well-screen placement for the shallow well. For both boreholes, 8-in steel outer casing was advanced to the completion depth, then the well was constructed with 4-in Schedule 40 PVC well casing and 10-ft, 20-slot well screens. Native sand and/or sand pack was placed around and up to 5 ft above the well screens and capped with bentonite. The outer steel casing was pulled back to expose the well screen. Well logs detailing the construction and lithologic information are included in appendix A.



Figure 2. The wells were drilled using a dual air rotary drilling rig.

Heaving sands encountered at about 90 ft below grade (bg) slowed the drilling process and eventually necessitated the use of drilling foam to keep sand and gravel from flowing into the drill stem.



Figure 3. Cuttings were logged onsite.

The deep well was screened from 236 to 246 ft bg below a silty-clay confining layer, and the shallow well was screened from 109.5 to 119.5 ft bg in unconfined obsidian-sand sediments. Both wells were developed until the discharge was clear and free of foam. Each well was completed with outer casing, protective posts, locking caps, and snow poles (fig. 4). After completion of all the drilling activities, the area was reseeded with a native grass seed mix.



Figure 4. Wells were completed with steel surface casing and protective posts.

Solinst Levellogger™ pressure transducers were deployed in both wells on November 30, 2021. The groundwater elevation in the deep (confined) well is generally 3 to 4 ft higher than the shallow well (fig. 5).

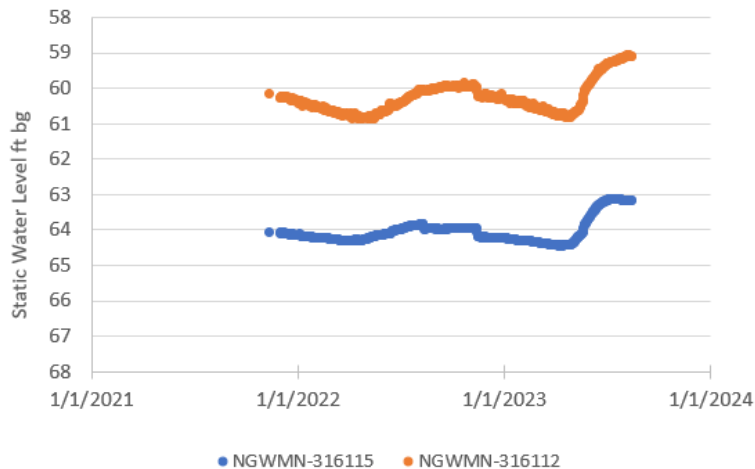


Figure 5. Hydrograph showing the water level in the deep confined aquifer is higher than in the shallow aquifer.

Each well was test-pumped at 12 gallons per minute (gpm) for 1 hr to document and assess hydraulic connection to the aquifer and determine a specific capacity (fig. 6). During the test, the pressure transducers were programmed to take readings every minute. The drawdown in both wells stabilized within about 5 min of the onset of pumping. The shallow well, MBMG-315115, recorded a drawdown of 0.56 ft for a specific capacity of 21.51 gpm/ft. The deep well, MBMG-316112, recorded a drawdown of 39.66 ft for a specific capacity of 0.30 gpm/ft.

There is a confining layer between the wells; neither well recorded any drawdown in response to the pumping of the other well.

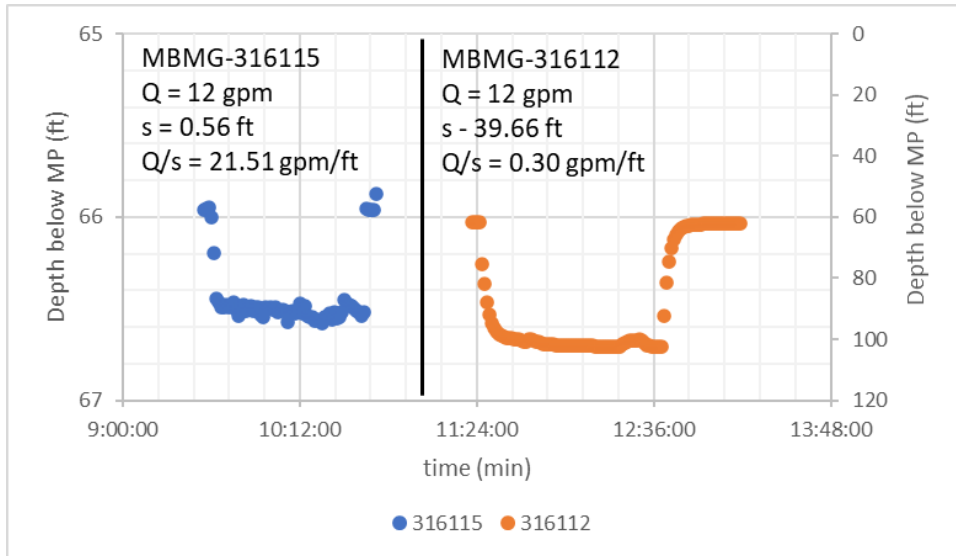


Figure 6. Results of specific capacity testing.

Water-Quality Sampling

Samples for major cations, anions, trace metals, nutrients, and stable isotopes were collected from both wells on August 15, 2022. The analytical results are included in appendix B. The water from both wells was relatively dilute; the total dissolved solids (TDS) for the deep well was 137 mg/L and for the shallow well was 119 mg/L. The sample from the deep well was slightly more enriched in sodium (fig. 7). Both samples contained arsenic: the concentration from the deep sample was 18.63 mg/L, above the 10 mg/L USEPA MCL; the concentration from the shallow sample was 6.69 mg/L.

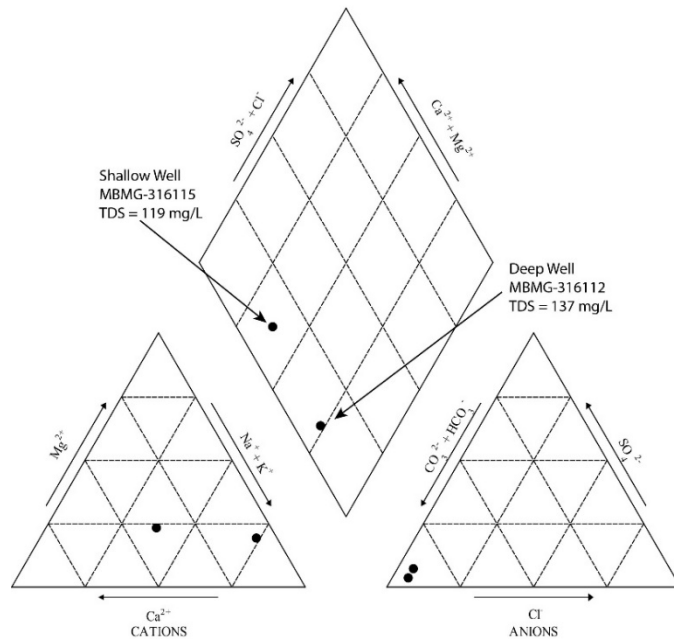


Figure 7. Piper diagram showing the deep well water quality is relatively enriched in sodium.

The wells were also sampled for stable isotopes (^2H and ^{18}O). The ^{18}O and ^2H abundances are reported as δ values, which represent the difference in parts per thousand (per mill, ‰) between the ratios of $^{18}\text{O}/^{16}\text{O}$ (or $^2\text{H}/\text{H}$) to that of standard mean ocean water (SMOW); δ values are calculated by:

$$(\delta \text{ in } \text{‰}) = (R_{\text{sample}}/R_{\text{SMOW}} - 1) * 1,000,$$

where R is the ratio of the heavy to light isotope. Therefore, the results are interpreted relative to SMOW. A positive δ value means that the sample contains more of the heavy isotope than standard ocean water; a negative δ value means that the sample contains less.

The results are included in appendix B, and shown on figure 8. The results are consistent with the isotopic composition of meteoric waters in the Yellowstone Park region (Kharaka and others, 2002).

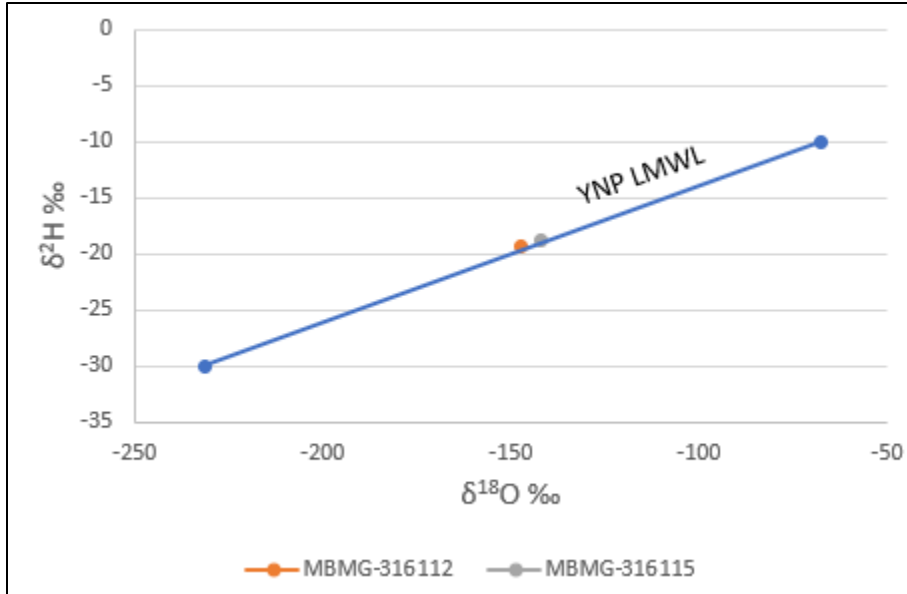


Figure 8. The stable isotope results plot along the local meteoric water line for the Yellowstone Park region.

NGWMN Registry

All site information and well construction details have been included in the Montana Bureau of Mines and Geology Ground Water Information Center database and added to the National Groundwater Monitoring Network well registry.

Agency	MBMG	MBMG
Site Name	MBMG-316115	MBMG-316112
National Aquifer Code	S100NRMTIB	S100NRMTIB
Aquifer Type	UNCONFINED	CONFINED
Water Quality Subnetwork	Yes	Yes
WQ Baseline Achieved	No	No
Water Level Subnetwork	Yes	Yes
WL Baseline Achieved	No	No
WL Well Characteristics	Background	Background
WL Well Type	Trend	Trend
WL Well Purpose	Dedicated Monitoring	Dedicated Monitoring

References

Kharaka, Y.K., Thordson, J.J., and White, L.D., 2002, Isotope and chemical compositions of meteoric and thermal waters and snow from the Great Yellowstone National Park Region: U.S. Geological Survey Open-File Report 02-194, 18 p.

Whitehead, R.L., 1996, Ground water atlas of the United States Segment 8—Montana, North Dakota, South Dakota, Wyoming: U.S. Geological Survey Hydrologic Investigations Atlas 370-I, 24 p.

Appendix A—Well Logs and Land Use Agreement

DEPTHS BELOW GROUND SURFACE IN FEET

COMPLETION

MP +2.85 FT

8" Steel outer casing +3.0 FT

GS Elev = 6655 FT
(Digital Map)

CASING

SIZE/MATERIAL

8" Steel -3 to 108 FT

4" PVC Spline lock

-2.85 to 109.5 FT

BOREHOLE

DIAMETER 8"

BACKFILL

MATERIAL

Cuttings

SEAL

TOP/MATERIAL

34 FT

Seal with bentonite pellets

SEAL

BOTTOM 80 FT

SCREEN

TOP/SIZE/TYPE

109.2 FT

Slotted 4" PVC

(0.020)

PACK MATERIAL

Native Sand

119.5 to 93.0 FT

Gravel

93.0 to 84 FT

Silica Sand

84 to 80 FT


SCREEN

BOTTOM 119.2 FT

End cap

DRILLED

DEPTH 119.5 FT

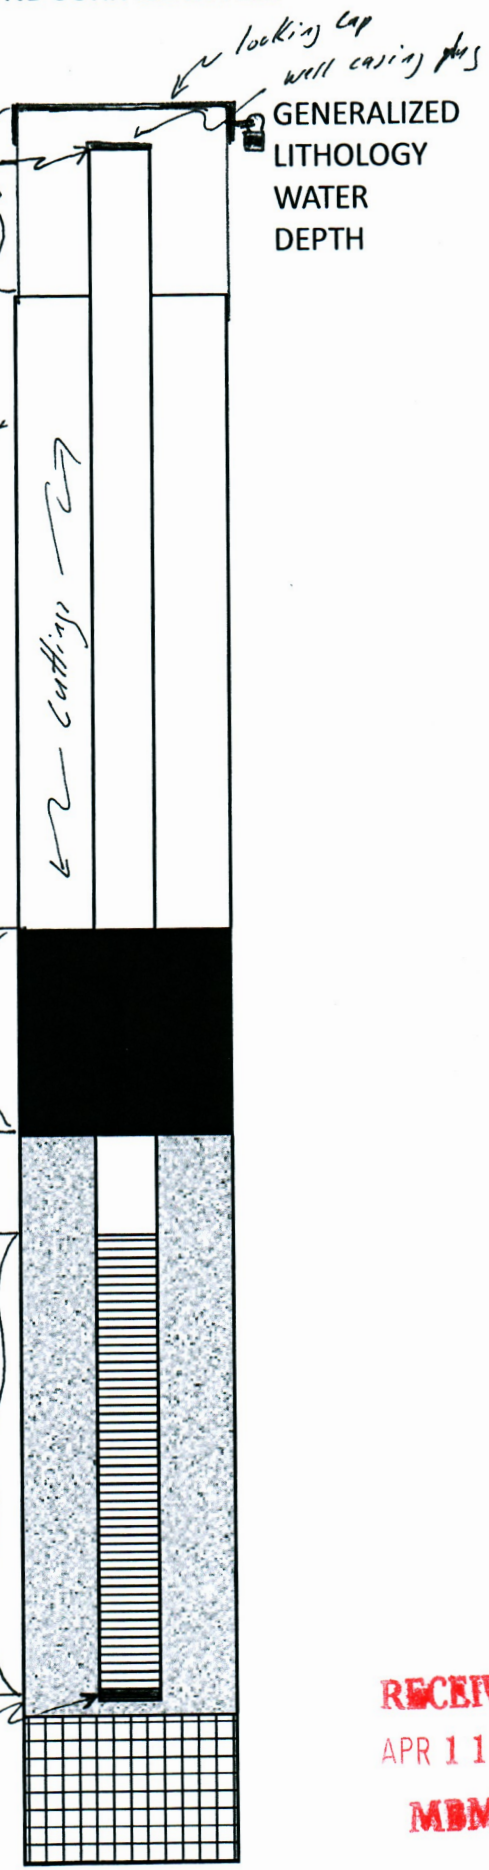

PROJECT

NGWMN

GWIC 316115

WELL NAME

USFS Fire Center - Shallow

LOCATION

T13 N15 R5 E1 W

S22 TRACT

LATITUDE

44.68854°

LONGITUDE

-111.10348

DATUM/METHOD

WGS 84 Digital Map

DATE WELL STARTED

7-25-2021

DATE WELL COMPLETED

7-27-2021

RECORDED BY

Alan English (MBMG)

DRILLER/LICENSE

Colten Baertsch #756

COMPANY

Excel Pump & Well Inc.

NOTES

* Heavy sand flowed into annulus from 119.5 to 93.0 FT before filter pack could be installed around screen. Placed 9ft of gravel on heaved sand from 93.0 to 84.0ft to lock in native sand and prevent additional heaving.

RECEIVED

APR 11 2022

MBMG

316115

DRILLING LOG

GWIC ID: 316115
Start Date: 7/25/2021
Finish Date: 7/26/2021
Site Name: USFS Fire Center Shallow Well
Location: Township 13 South, Range 5 East, Section 22
Latitude: 44.68861° N (Digital Map Method)
Longitude: - 111.10335°
Elevation: 6656 ft MSL
Log By: Alan English, Montana Bureau of Mines and Geology

DEPTH (ft bgs)		LITHOLOGY	REMARKS
FROM	TO		
0	7	FINE-MEDIUM LT GRAY OBSIDIAN RICH SAND-SILTY W/SOME COBBLES	
7	30	MEDIUM TO COARSE LT GRAY OSIDIAN RICH SAND-SILTY, GRAVELLY	
30	53	FINE TO MEDIUM LT GRAY OBSIDIAN RICH SAND-SILTY, GRAVELLY	
53	60	MEDIUM TO COARSE LT GRAY OBSIDIAN RICH SAND-GRAVELLY, SILTY	
60	62	FINE TAN SAND AND SILT	MOIST AT 60 FT
62	88	FINE TO MEDIUM LT GRAY OBSIDIAN RICH SAND-SILTY, GRAVELLY	
88	91	COARSE LT GRAY OBSIDIAN RICH SAND-GRAVELLY	LITTLE WATER 89-91 FT
91	119.5	FINE TO MEDIUM LT GRAY OBSIDIAN RICH SAND, SILTY, GRAVELLY-HEAVING SANDS	

RECEIVED

APR 11 2022

MONG

DEPTHS BELOW GROUND SURFACE IN FEET

COMPLETION

MP +2.85 FT
8" steel
outer casing +3 FT
GS 6,655 FT

CASING
SIZE/MATERIAL
8" steel, -3 to 236.2 FT
4" PVC spline lock
-2.85 to 235.5 FT

BOREHOLE
DIAMETER 8"

BACKFILL
MATERIAL
Cuttings

SEAL
TOP/MATERIAL
170 FT


Seal with
bentonite pellets
SEAL
BOTTOM 220 FT

SCREEN
TOP/SIZE/TYPE
235.5 FT
Slotted 4" PVC
(0.020)

PACK MATERIAL
Gravel 246.0 to
227.0 FT
Silica Sand
227.0 to 220.0
FT

SCREEN
BOTTOM 245.7 FT
End Cap

DRILLED
DEPTH 246.0 FT

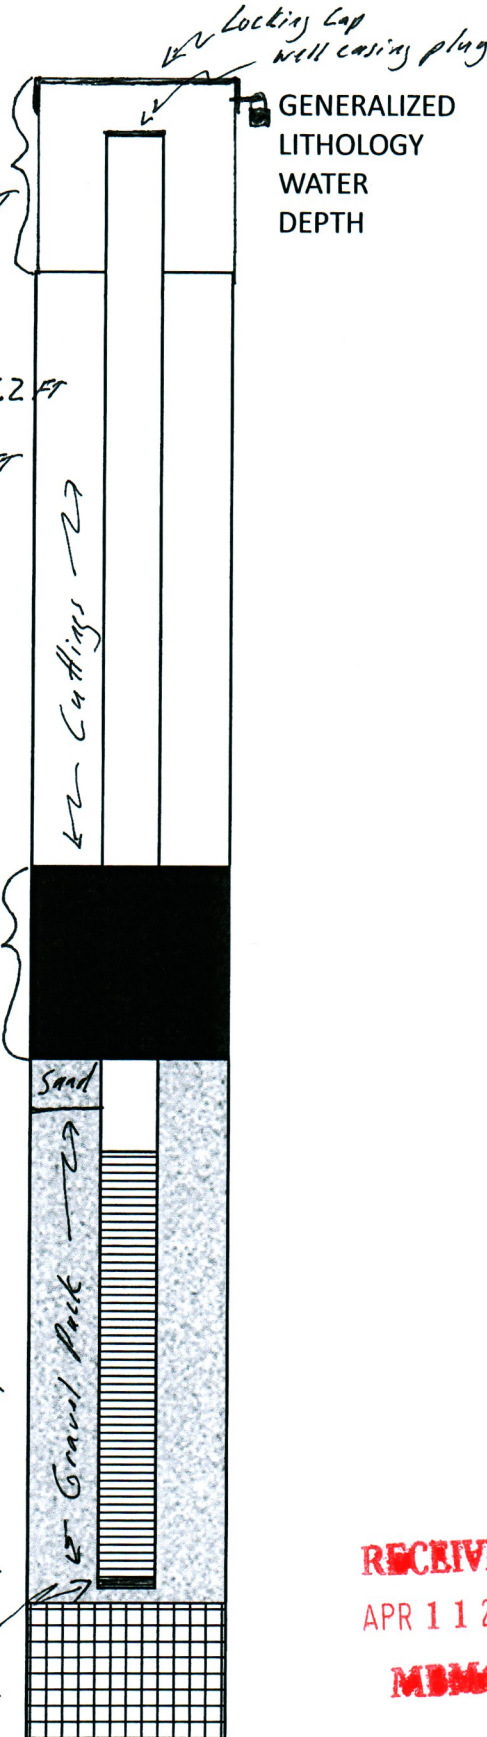

PROJECT
NGWMN

GWIC 316112

WELL NAME
USFS Fire Center - Deep

LOCATION
T 13 N, R 5 E, W
S 22 TRACT
LATITUDE

44.68853°
LONGITUDE

-111.10339
DATUM/METHOD

WGS 84 - Digital Map
DATE WELL STARTED

6-23-2021
DATE WELL COMPLETED

6-28-2021
RECORDED BY

Alan English (MBMG)
DRILLER/LICENSE

Colten Baertsch #756
COMPANY

Exel Pump & Well Inc.
NOTES

Only pulled steel casing
back ~ 9.2 ft because
PVC casing string locked up.
Stopped to avoid damaging
screen & filter pack.

RECEIVED
APR 11 2022
MBMG

316112

135 OSE 22

DRILLING LOG

GWIC ID: 316112
Start Date: 6/23/2021
Finish Date: 6/28/2021
Site Name: USFS Fire Center Deep Well
Location: Township 13 South, Range 5 East, Section 22
Latitude: 44.68861° N (Digital Map Method)
Longitude: - 111.10337°
Elevation: 6656 ft MSL
Log By: Alan English, Montana Bureau of Mines and Geology

DEPTH (ft bgs)		LITHOLOGY	REMARKS
FROM	TO		
0	7	FINE-MEDIUM LT GRAY OBSIDIAN RICH SAND-SILTY W/SOME COBBLES	
7	30	MEDIUM TO COARSE LT GRAY OSIDIAN RICH SAND-SILTY, GRAVELLY	
30	53	FINE TO MEDIUM LT GRAY OBSIDIAN RICH SAND-SILTY, GRAVELLY	
53	60	MEDIUM TO COARSE LT GRAY OBSIDIAN RICH SAND-GRAVELLY, SILTY	
60	62	FINE TAN SAND AND SILT	MOIST AT 60 FT
62	88	FINE TO MEDIUM LT GRAY OBSIDIAN RICH SAND-SILTY, GRAVELLY	
88	91	COARSE LT GRAY OBSIDIAN RICH SAND-GRAVELLY	LITTLE WATER 89-91 FT
91	127	FINE TO MEDIUM LT GRAY OBSIDIAN RICH SAND, SILTY, GRAVELLY-HEAVING SANDS	
127	129	LIGHT GRAY CLAY-SILTY, SOFT	
129	134	TAN SILT, CLAYEY, SANDY, HARD	
134	135	FINE TAN SAND	
135	157	FINE TO MEDIUM LT GRAY OBSIDIAN RICH SAND, SILTY, GRAVELLY-HEAVING SANDS	
157	178	MEDIUM TO COARSE LT GRAY OBSIDIAN RICH SAND-SILTY AND GRAVELLY-HEAVING SANDS	SOME WATER AT 168 FT
178	180	BROWN CLAY-HARD	
180	188	MEDIUM LT GRAY OBSIDIAN RICH SAND-CLAYEY AND SILTY	H ₂ S ODOR AT 180 FT
188	193	BROWN CLAY-SILTY, WITH WOOD AND PEAT FRAGEMENTS	
193	197	MEDIUM TO COARSE LT GRAY OBSIDIAN RICH SAND,SILTY, GRAVELLY	
197	208	FINE TO MEDIUM LT GRAY OBSIDIAN SAND-SILTY-HEAVING SANDS	
208	214	FINE GREENISH-GRAY SAND-CLAYEY AND SILTY	
214	224	FINE LT GRAY OBSIDIAN RICH SAND-SILTY-HEAVING SANDS	
224	227	COARSE LT GRAY OBSIDIAN SAND-GRAVELLY	
227	228	GRAY CLAY	
228	240	MEDIUAM TO COARSE LT GRAY OBSIDIAN RICH SAND-GRAVELLY-HEAVING SANDS	WATER AT 228 FT
240	246	LIGHT GRAY GRAVEL AND COARSE SAND-SOME HEAVING, HARD GROUND AT 242 FT	MORE WATER

RECEIVED

APR 11 2022

MBMG

316112

**U.S. DEPARTMENT OF AGRICULTURE
FOREST SERVICE
AMENDMENT
FOR**

SPECIAL-USE AUTHORIZATION


Amendment#: 1

This amendment is attached to and made a part of the GAR20 special use authorization for WATER QUALITY MONITORING STATION issued to MONTANA TECHNOLOGICAL UNIVERSITY on 11/13/2017 which is hereby amended as follows:

Amendment to existing authorization (GAR 20) for operating and maintaining water quality monitoring stations. Amendment includes the following:


1. Add to authorization monitoring of existing USFS public water supply well at Cooke Pass Administrative site/Colter Campground (T. 9 S., R. 15 E., Sec. 29) to allow for long-term groundwater monitoring. USFS will be drilling a new well in adjacent location in 2021 at which point monitoring will be moved to this location.
2. Install and maintain two groundwater monitoring wells at the Smoke Jumper Base, West Yellowstone, MT (T. 13. S., R. 5 E., sec. 22) to allow for long-term monitoring shallow and deep groundwater. The wells will be located next to each other, within a 20' x 20' area completed at depths of approximately 80' and 240'.
3. Install and maintain two groundwater monitoring wells adjacent to the Old Stage Road, West Yellowstone, MT (T. 13 S., R. 5 E., SW1/4SE1/4 sec. 18) to allow for long-term monitoring of shallow and deep groundwater. The wells will be located next to each other, within a 20' X 20' area, completed at depths of approximately 80' and 240'.

This Amendment is accepted subject to the conditions set forth herein, and to conditions N/A to N/A attached hereto and made a part of this Amendment.



Alan English, Hydrogeologist
Montana Bureau of Mines and Geology

MARY C ERICKSON
FOREST SUPERVISOR
CUSTER GALLATIN NATIONAL FOREST



Date

Date

According to the Paperwork Reduction Act of 1995, an agency may not conduct or sponsor, and a person is not required to respond to a collection of information unless it displays a valid OMB control number. The valid OMB control number for this information collection is 0596-0082. The time required to complete this information collection is estimated to average one (1) hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or part of an individual's income is derived from any public assistance. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at 202-720-2600 (voice and TDD).

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, 1400 Independence Avenue, SW, Washington, DC 20250-9410 or call toll free (866) 632-9992 (voice). TDD users can contact USDA through local relay or the Federal relay at (800) 877-8339 (TDD) or (866) 377-8642 (relay voice). USDA is an equal opportunity provider and employer.

The Privacy Act of 1974 (5 U.S.C. 552a) and the Freedom of Information Act (5 U.S.C. 552) govern the confidentiality to be provided for information received by the Forest Service.

Appendix B—Water-Quality Results

Ground-Water Information Center Water Quality Report

Site Name: MBMG USFS SMOKE JUMPER N.W. SHALLOW WELL

Report Date: 2/14/2023

[Compare to Water Quality Standards](#)

Location Information

Sample Id/Site Id: 253882 / 316115	Sample Date: 8/15/2022 1:37:00 PM
Location (TRS): 13S 05E 22 BDBD	Agency/Sampler: MBMG / ENGLISH, ALAN
Latitude/Longitude: 44° 41' 18" N 111° 6' 12" W	Field Number: 316115
Datum: WGS84	Lab Date: 9/2/2022 1:03:58 PM
Altitude: 6656	Lab/Analyst: MBMG / TIMMER, JACKIE
County/State: GALLATIN / MT	Sample Method/Handling: PUMPED / ru:1 ra:0 fu:2 fa:2
Site Type: WELL	Procedure Type: DISSOLVED
Geology: 112SNGR	Total Depth (ft): 119.5
USGS 7.5' Quad:	SWL-MP (ft): 66.74
PWS Id:	Depth Water Enters (ft): 109.2
Project: YNPMON, YNPWYWQ, NGWMN-MONTANA	

Major Ion Results

	mg/L	meq/L		mg/L	meq/L
Calcium (Ca)	11.450	0.571	Bicarbonate (HCO3)	84.130	1.379
Magnesium (Mg)	4.150	0.342	Carbonate (CO3)	0.000	0.000
Sodium (Na)	10.680	0.465	Chloride (Cl)	3.040	0.086
Potassium (K)	3.410	0.087	Sulfate (SO4)	5.430	0.113
Iron (Fe)	<0.015 U	0.000	Nitrate (as N)	0.470	0.034
Manganese (Mn)	<0.002 U	0.000	Fluoride (F)	1.640	0.086
Silica (SiO2)	38.300		Orthophosphate (as P)	<0.020 U	0.000
Total Cations		1.468	Total Anions		1.698

Trace Element Results (µg/L)

Aluminum (Al):	<2.000 U	Cesium (Cs):	0.330 J	Molybdenum (Mo):	3.860	Strontium (Sr):	16.660
Antimony (Sb):	0.320 J	Chromium (Cr):	<0.100 U	Nickel (Ni):	<0.100 U	Thallium (Tl):	<0.100 U
Arsenic (As):	6.690	Cobalt (Co):	<0.100 U	Niobium (Nb):	<0.100 U	Thorium (Th):	<0.100 U
Barium (Ba):	7.980	Copper (Cu):	<0.500 U	Neodymium (Nd):	<0.100 U	Tin (Sn):	<0.100 U
Beryllium (Be):	<0.100 U	Gallium (Ga):	<0.100 U	Palladium (Pd):	<0.100 U	Titanium (Ti):	<0.100 U
Boron (B):	28.790	Lanthanum (La):	<0.100 U	Praseodymium (Pr):	<0.100 U	Tungsten (W):	0.750
Bromide (Br):	<10.000 U	Lead (Pb):	<0.060 U	Rubidium (Rb):	3.920	Uranium (U):	0.280 J
Cadmium (Cd):	<0.100 U	Lithium (Li):	50.480	Silver (Ag):	<0.100 U	Vanadium (V):	6.110
Cerium (Ce):	<0.100 U	Mercury (Hg):	NR	Selenium (Se):	<0.100 U	Zinc (Zn):	0.910 J
						Zirconium (Zr):	<0.100 U

Field Chemistry and Other Analytical Results

**Total Dissolved Solids (mg/L):	118.98	Field Hardness as CaCO3 (mg/L):	NR	Ammonia (mg/L):	NR
**Sum of Diss. Constituents (mg/L):	161.6	Hardness as CaCO3:	45.67	T.P. Hydrocarbons (µg/L):	NR
Field Conductivity (µmhos):	144.1	Field Alkalinity as CaCO3 (mg/L):	NR	PCP (µg/L):	NR
Lab Conductivity (µmhos):	144.31	Alkalinity as CaCO3 (mg/L):	68.89	Phosphorus, TD (mg/L):	0.040 J
Field pH:	8.14	Ryznar Stability Index:	9.166	Field Nitrate (mg/L):	0.000
Lab pH:	8.04	Sodium Adsorption Ratio:	0.7083	Field Dissolved O2 (mg/L):	2.580
Water Temp (°C):	7.2	Langlier Saturation Index:	-0.563	Field Chloride (mg/L):	NR
Air Temp (°C):	29.5	Nitrite (mg/L as N):	<0.010 U	Field Redox (mV):	82.8
Nitrate + Nitrite (mg/L as N)	0.400	Hydroxide (mg/L as OH):	0.000	Lab, Dissolved Organic Carbon (mg/L):	NR
Total Kjeldahl Nitrogen (mg/L as N)	NR	Lab, Dissolved Inorganic Carbon (mg/L):	NR	Lab, Total Organic Carbon (mg/L):	NR
Total Nitrogen (mg/L as N)	NR	Acidity to 4.5 (mg/L CaCO3)	NR	Acidity to 8.3 (mg/L CaCO3)	NR
As(III) (ug/L)	NR	As(V) (ug/L)	NR	Total Susp Solids (mg/L)	NR

Notes

Sample Condition: WATER CLEAR
Field Remarks:
Lab Remarks:

Explanation: mg/L = milligrams per Liter; µg/L = micrograms per Liter; ft = feet; NR = No Reading in GWIC

Qualifiers: J = Estimated quantity above detection limit but below reporting limit; P = Preserved sample; S = Method of standard additions; U = Undetected quantity below detection limit; * = Duplicate analysis not within control limits; ** = Sum of Dissolved Constituents is the sum of major cations (Na, Ca, K, Mg, Mn, Fe) and anions (HCO3, CO3, SO4, Cl, SiO2, NO3, F) in mg/L. Total Dissolved Solids is reported as equivalent weight of evaporation residue.

Disclaimer

These data represent the contents of the GWIC databases at the Montana Bureau of Mines and Geology at the time and date of the retrieval. The information is considered unpublished and is subject to correction and review on a daily basis. The Bureau warrants the accurate transmission of the data to the original end user. Retransmission of the data to other users is discouraged and the Bureau claims no responsibility if the material is retransmitted.

Ground-Water Information Center Water Quality Report

Site Name: MBMG USFS SMOKE JUMPER S.E. DEEP WELL

Report Date: 2/14/2023

[Compare to Water Quality Standards](#)

Location Information

Sample Id/Site Id: 253883 / 316112	Sample Date: 8/15/2022 1:46:00 PM
Location (TRS): 13S 05E 22	Agency/Sampler: MBMG / ENGLISH, ALAN
Latitude/Longitude: 44° 41' 18" N 111° 6' 12" W	Field Number: 316112
Datum: WGS84	Lab Date: 9/2/2022 1:03:58 PM
Altitude:	Lab/Analyst: MBMG / TIMMER, JACKIE
County/State: GALLATIN / MT	Sample Method/Handling: PUMPED / ru:1 ra:0 fu:2 fa:2
Site Type: WELL	Procedure Type: DISSOLVED
Geology: 112SNR	Total Depth (ft): 246
USGS 7.5' Quad:	SWL-MP (ft): 62.91
PWS Id:	Depth Water Enters (ft): 236
Project: YNPMON, NGWMN-MONTANA	

Major Ion Results

	mg/L	meq/L		mg/L	meq/L
Calcium (Ca)	2.580	0.129	Bicarbonate (HCO3)	100.340	1.645
Magnesium (Mg)	4.220	0.347	Carbonate (CO3)	2.330	0.083
Sodium (Na)	27.440	1.194	Chloride (Cl)	3.630	0.102
Potassium (K)	4.420	0.113	Sulfate (SO4)	3.140	0.065
Iron (Fe)	0.026 J	0.000	Nitrate (as N)	<0.010 U	0.000
Manganese (Mn)	0.052	0.002	Fluoride (F)	2.750	0.145
Silica (SiO2)	38.310		Orthophosphate (as P)	0.040 J	0.000
Total Cations		1.792	Total Anions		2.041

Trace Element Results (µg/L)

Aluminum (Al):	18.500	Cesium (Cs):	0.260 J	Molybdenum (Mo):	5.950	Strontium (Sr):	16.580
Antimony (Sb):	<0.100 U	Chromium (Cr):	<0.100 U	Nickel (Ni):	<0.100 U	Thallium (Tl):	<0.100 U
Arsenic (As):	18.630	Cobalt (Co):	<0.100 U	Niobium (Nb):	<0.100 U	Thorium (Th):	<0.100 U
Barium (Ba):	7.490	Copper (Cu):	<0.500 U	Neodymium (Nd):	<0.100 U	Tin (Sn):	<0.100 U
Beryllium (Be):	<0.100 U	Gallium (Ga):	<0.100 U	Palladium (Pd):	<0.100 U	Titanium (Ti):	<0.100 U
Boron (B):	53.160	Lanthanum (La):	<0.100 U	Praseodymium (Pr):	<0.100 U	Tungsten (W):	2.980
Bromide (Br):	<10.000 U	Lead (Pb):	<0.060 U	Rubidium (Rb):	6.750	Uranium (U):	<0.100 U
Cadmium (Cd):	<0.100 U	Lithium (Li):	109.820	Silver (Ag):	<0.100 U	Vanadium (V):	1.870
Cerium (Ce):	<0.100 U	Mercury (Hg):	NR	Selenium (Se):	<0.100 U	Zinc (Zn):	1.060 J
						Zirconium (Zr):	<0.100 U

Field Chemistry and Other Analytical Results

**Total Dissolved Solids (mg/L):	137.08	Field Hardness as CaCO3 (mg/L):	NR	Ammonia (mg/L):	NR
**Sum of Diss. Constituents (mg/L):	187.82	Hardness as CaCO3:	23.81	T.P. Hydrocarbons (µg/L):	NR
Field Conductivity (µmhos):	171	Field Alkalinity as CaCO3 (mg/L):	NR	PCP (µg/L):	NR
Lab Conductivity (µmhos):	158.62	Alkalinity as CaCO3 (mg/L):	85.35	Phosphorus, TD (mg/L):	0.070 J
Field pH:	8.21	Ryznar Stability Index:	10.134	Field Nitrate (mg/L):	0.000
Lab pH:	8.18	Sodium Adsorption Ratio:	2.4075	Field Dissolved O2 (mg/L):	0.390
Water Temp (°C):	9.6	Langlier Saturation Index:	-0.977	Field Chloride (mg/L):	NR
Air Temp (°C):	29.5	Nitrite (mg/L as N):	<0.010 U	Field Redox (mV):	-131.9
Nitrate + Nitrite (mg/L as N)	<0.200 U	Hydroxide (mg/L as OH):	0.000	Lab, Dissolved Organic Carbon (mg/L):	NR
Total Kjeldahl Nitrogen (mg/L as N)	NR	Lab, Dissolved Inorganic Carbon (mg/L):	NR	Lab, Total Organic Carbon (mg/L):	NR
Total Nitrogen (mg/L as N)	NR	Acidity to 4.5 (mg/L CaCO3)	NR	Acidity to 8.3 (mg/L CaCO3)	NR
As(III) (ug/L)	NR	As(V) (ug/L)	NR	Total Susp Solids (mg/L)	NR

Notes

Sample Condition: SLIGHTLY CLOUDY-MILKY WHITE

Field Remarks:
Lab Remarks:

Explanation: mg/L = milligrams per Liter; µg/L = micrograms per Liter; ft = feet; NR = No Reading in GWIC

Qualifiers: J = Estimated quantity above detection limit but below reporting limit; P = Preserved sample; S = Method of standard additions; U = Undetected quantity below detection limit; * = Duplicate analysis not within control limits; ** = Sum of Dissolved Constituents is the sum of major cations (Na, Ca, K, Mg, Mn, Fe) and anions (HCO3, CO3, SO4, Cl, SiO2, NO3, F) in mg/L. Total Dissolved Solids is reported as equivalent weight of evaporation residue.

Disclaimer

These data represent the contents of the GWIC databases at the Montana Bureau of Mines and Geology at the time and date of the retrieval. The information is considered unpublished and is subject to correction and review on a daily basis. The Bureau warrants the accurate transmission of the data to the original end user. Retransmission of the data to other users is discouraged and the Bureau claims no responsibility if the material is retransmitted.

Ground-Water Information Center

Isotope Tracer Report

Site Name: MBMG USFS SMOKE JUMPER N.W. SHALLOW WELL

Report Date: 2/14/2023

Location Information

Sample Id/Site Id:	253882 / 316115	Sample Date:	8/15/2022 1:37:00 PM
Location (TRS):	13S 05E 22 BDBD	Agency/Sampler:	MBMG / ENGLISH, ALAN
Latitude/Longitude:	44° 41' 18" N 111° 6' 12" W	Field Number:	316115
Datum:	WGS84	Lab Date:	9/2/2022 1:03:58 PM
Altitude:	6656	Lab/Analyst:	MBMG / TIMMER, JACKIE
County/State:	GALLATIN / MT	Sample Method/Handling:	PUMPED / ru:1 ra:0 fu:2 fa:2
Site Type:	WELL	Procedure Type:	DISSOLVED
Geology:	112SNGR	Total Depth (ft):	119.5
USGS 7.5' Quad:		SWL-MP (ft):	66.74
PWS Id:		Depth Water Enters (ft):	109.2
Project:	YNPMON, YNPWYWQ, NGWMN-MONTANA		

Radon (Rn222 - pCi/L):	NR	Argon (Ar39):	NR
Carbon (C13):	NR	Silicon (Si32):	NR
Carbon (C14):	NR	Chlorine (Cl36):	NR
Tritium (H3 - TU):	NR	Lithium (Li6):	NR
H3/He3 Ratio:	NR	Krypton (Kr85):	NR
Deuterium (H2):	-141.000	Boron (B11)	NR
Oxygen (O18):	-18.700	Strontium (Sr87)	NR
Sulphur (S34):	NR	Chloro-fluorocarbon (CFC-11):	NR
Iodine (I129):	NR	Chloro-fluorocarbon (CFC-12):	NR
Nitrogen (N15):	NR	Chloro-fluorocarbon (CFC-113):	NR
Nitrogen (N15 of Nitrate):	NR	Oxygen (O18 of Nitrate):	NR
Sulphur (S34 of Sulfate):	NR	Oxygen (O18 of Sulfate):	NR

Sample Condition: WATER CLEAR

Notes

Field Remarks:

Lab Remarks:

Explanation: pCi/L = picocuries per Liter; TU = Tritium Units; NR = No Reading in GWIC

Disclaimer

These data represent the contents of the GWIC databases at the Montana Bureau of Mines and Geology at the time and date of the retrieval. The information is considered unpublished and is subject to correction and

review on a daily basis. The MBMG warrants the accurate transmission of the data to the original end user. Retransmission of the data to other users is discouraged and the MBMG claims no responsibility if the material is retransmitted.

Ground-Water Information Center

Isotope Tracer Report

Site Name: MBMG USFS SMOKE JUMPER S.E. DEEP WELL

Report Date: 2/14/2023

Location Information

Sample Id/Site Id:	253883 / 316112	Sample Date:	8/15/2022 1:46:00 PM
Location (TRS):	13S 05E 22	Agency/Sampler:	MBMG / ENGLISH, ALAN
Latitude/Longitude:	44° 41' 18" N 111° 6' 12" W	Field Number:	316112
Datum:	WGS84	Lab Date:	9/2/2022 1:03:58 PM
Altitude:		Lab/Analyst:	MBMG / TIMMER, JACKIE
County/State:	GALLATIN / MT	Sample Method/Handling:	PUMPED / ru:1 ra:0 fu:2 fa:2
Site Type:	WELL	Procedure Type:	DISSOLVED
Geology:	112SNGR	Total Depth (ft):	246
USGS 7.5' Quad:		SWL-MP (ft):	62.91
PWS Id:		Depth Water Enters (ft):	236
Project:	YNPMON, NGWMN-MONTANA		

Radon (Rn222 - pCi/L):	NR	Argon (Ar39):	NR
Carbon (C13):	NR	Silicon (Si32):	NR
Carbon (C14):	NR	Chlorine (Cl36):	NR
Tritium (H3 - TU):	NR	Lithium (Li6):	NR
H3/He3 Ratio:	NR	Krypton (Kr85):	NR
Deuterium (H2):	-147.000	Boron (B11):	NR
Oxygen (O18):	-19.300	Strontium (Sr87):	NR
Sulphur (S34):	NR	Chloro-fluorocarbon (CFC-11):	NR
Iodine (I129):	NR	Chloro-fluorocarbon (CFC-12):	NR
Nitrogen (N15):	NR	Chloro-fluorocarbon (CFC-113):	NR
Nitrogen (N15 of Nitrate):	NR	Oxygen (O18 of Nitrate):	NR
Sulphur (S34 of Sulfate):	NR	Oxygen (O18 of Sulfate):	NR

Sample Condition: SLIGHTLY CLOUDY-MILKY WHITE

Notes

Field Remarks:

Lab Remarks:

Explanation: **pCi/L** = picocuries per Liter; **TU** = Tritium Units; **NR** = No Reading in GWIC

Disclaimer

These data represent the contents of the GWIC databases at the Montana Bureau of Mines and Geology at the time and date of the retrieval. The information is considered unpublished and is subject to correction and review on a daily basis. The MBMG warrants the accurate transmission of the data to the original end user. Retransmission of the data to other users is discouraged and the MBMG claims no responsibility if the material is retransmitted.